

XFM Series 2" Stainless Steel Snow Melt Manifolds

SKU - Part number: XFM204 - XFM216

Max. flow rate: 75 GPM Trunk, 4.9 GPM per circuit

Max. temperature: 194 °F Max. pressure: 145 Psi

Included are:

Manifold with mounting brackets 2 x Air vents and drains 2 x 2" End caps
Blue and red circuit valves 2 x 2" G x SWEAT adapters
3/4" Compression adapters

Compression Adapters

 $^3\!4$ " Compression adapters come as standard equipment. Optional $^1\!2$ " or $^5\!8$ " compression adapters are available.

Versatile installation

Horizontal or vertical mounted, the air vents are always functional. Rhella X-treme flow manifolds offer true 2" unrestricted flow through the Supply-Trunks-Return path.


Air Vents and Drains

Every Rhella X-treme flow manifold comes with built in automatic air vents and drains.

Type XFM 2" Manifold Material SEA 304 Stainless Steel Warranty 5 Years Trunk Diameter 2" Loop Size 4 to 16 Loops PEX Size ½" 5%" 3¼" Trunk Thread DN 50, 2" Loop Thread 20 mm Application Radiant Heating Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM						
Warranty 5 Years Trunk Diameter 2" Loop Size 4 to 16 Loops PEX Size ½" 5%" ¾" Trunk Thread DN 50, 2" Loop Thread 20 mm Application Radiant Heating Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Туре	XFM 2" Manifold				
Trunk Diameter 2" Loop Size 4 to 16 Loops PEX Size ½" 5%" ¾" Trunk Thread DN 50, 2" Loop Thread 20 mm Application Radiant Heating Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Material	SEA 304 Stainless Steel				
Loop Size 4 to 16 Loops PEX Size 1/2" 5/8" 3/4" Trunk Thread DN 50, 2" Loop Thread 20 mm Application Radiant Heating Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Warranty	5 Years				
PEX Size 1/2" 5/8" 3/4" Trunk Thread DN 50, 2" Loop Thread Application Radiant Heating Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) Max Flow Rate (Loop) 4.9 GPM	Trunk Diameter	2"				
Trunk Thread DN 50, 2" Loop Thread 20 mm Application Radiant Heating Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Loop Size	4 to 16 Loops				
Loop Thread 20 mm Application Radiant Heating Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	PEX Size	1/2" 5/8" 3/4"				
Application Radiant Heating Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Trunk Thread	DN 50, 2"				
Fitting System PEX Compression Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Loop Thread	20 mm				
Tubing PEX Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Application	Radiant Heating				
Test Pressure 145 Psi Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Fitting System	PEX Compression				
Max Flow Rate (Trunk) 75 GPM Max Flow Rate (Loop) 4.9 GPM	Tubing	PEX				
Max Flow Rate (Loop) 4.9 GPM	Test Pressure	145 Psi				
по ст. т	Max Flow Rate (Trunk)	75 GPM				
Man Oassis Tara	Max Flow Rate (Loop)	4.9 GPM				
Max. Operating temp. 194°F at 44 Psi	Max. Operating Temp.	194°F at 44 Psi				
44 Psi at 194 °F		44 Psi at 194 °F				
Max. Operating Pressure 87 Psi at 158 °F	Max. Operating Pressure	87 Psi at 158 °F				
145 Psi at 68 °F		145 Psi at 68 °F				

2" Snow Melt Manifolds

Г

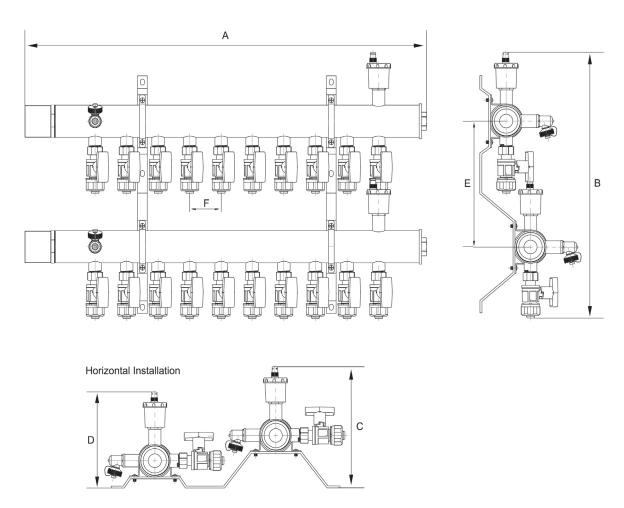

Available Loop Sizes

Model Number	Loop Size	А	В	С	D	E	F	Weight lbs
XFM204	4 Loops	17"	21"	7-3/4"	5-1/2"	9-¾"	2-5/8"	19.5
XFM205	5 Loops	19-1/2"	21"	7-3/4"	5-1/2"	9-¾"	2-5/8"	22.0
XFM206	6 Loops	22-1/4"	21"	7-3/4"	5-1/2"	9-¾"	2-5/8"	24.5
XFM207	7 Loops	25"	21"	7-3/4"	5-1/2"	9-¾"	2-5/8"	27.0
XFM208	8 Loops	27-1/2"	21"	7-3/4"	5-1/2"	9-3/4"	2-5/8"	29.5
XFM209	9 Loops	29-¾"	21"	7-3/4"	5-1/2"	9-3/4"	2-5/8"	32.0
XFM210	10 Loops	32-1/2"	21"	7-3/4"	5-1/2"	9-3/4"	2-5/8"	34.5
XFM211	11 Loops	35"	21"	7-3/4"	5-1/2"	9-3/4"	2-5/8"	37.0
XFM212	12 Loops	37-1/2"	21"	7-3/4"	5-1/2"	9-3/4"	2-5/8"	39.5
XFM213	13 Loops	40"	21"	7-3/4"	5-1/2"	9-3/4"	2-5/8"	43.5
XFM214	14 Loops	42-¾"	21"	7-3/4"	5-1/2"	9-¾"	2-5/8"	45.0
XFM215	15 Loops	45-¼"	21"	7-3/4"	5-1/2"	9-¾"	2-5/8"	47.5
XFM216	16 Loops	47-3/4"	21"	7-3/4"	5-1/2"	9-3/4"	2-5/8"	50.0