


1-1/4" Stainless Steel Manifolds

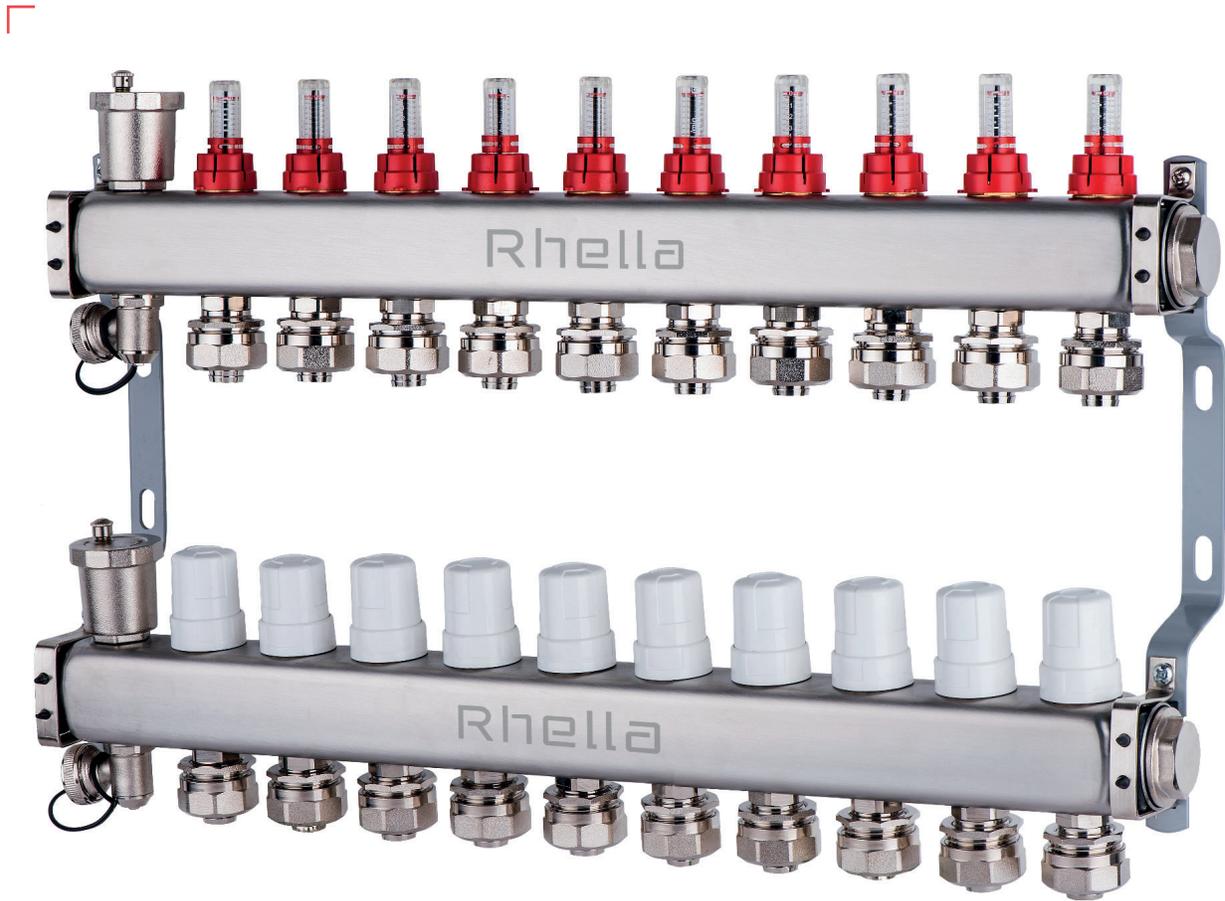

Rhella 1-1/4" Stainless Steel Manifolds

SKU - Order number: HFM109 - HFM112


Rhella 1-1/4" 304 food grade stainless steel manifolds with Swiss made Taconova flow meters.
 Max Flow Rate: 18 gpm Trunk, 1.5 gpm per Circuit
 Maximum Temperature: 194F at 43.8 psi
 Maximum Pressure: 145 psi at 68F

Included are:

- Manifold with flow meters and loop valves
- Mounting brackets
- 3/4" Compression adapters*
- 1 x 1- 1/4" End cap
- 1 x Air vent with drain
- 1 x 1- 1/4" Isolation ball valve
- 1 x 1- 1/4" Y-strainer isolation ball valve
- Rhella thermal actuator compatible circuit valves
- Optional 1/2" and 5/8" adapters available

Type	1-1/4" Manifold
Material	SEA 304 Stainless Steel
Warranty	5 Years
Circuit Size	9 to 12 Loops
PEX Size	1/2", 5/8" or 3/4"
Supply Thread	DN 32, 1 - 1/4"
Loop Thread	20 mm
Application	Radiant Heating
Fitting System	PEX Compression
Tubing	PEX
Test Pressure	145 psi
Flow Capacity CV	1.1 (Loop)
Max. Operating Temp.	194°F at 44 psi
Max. Operating Pressure	44 psi at 194°F
	87 psi at 158°F
	145 psi at 68°F

1-¼" STAINLESS STEEL MANIFOLDS

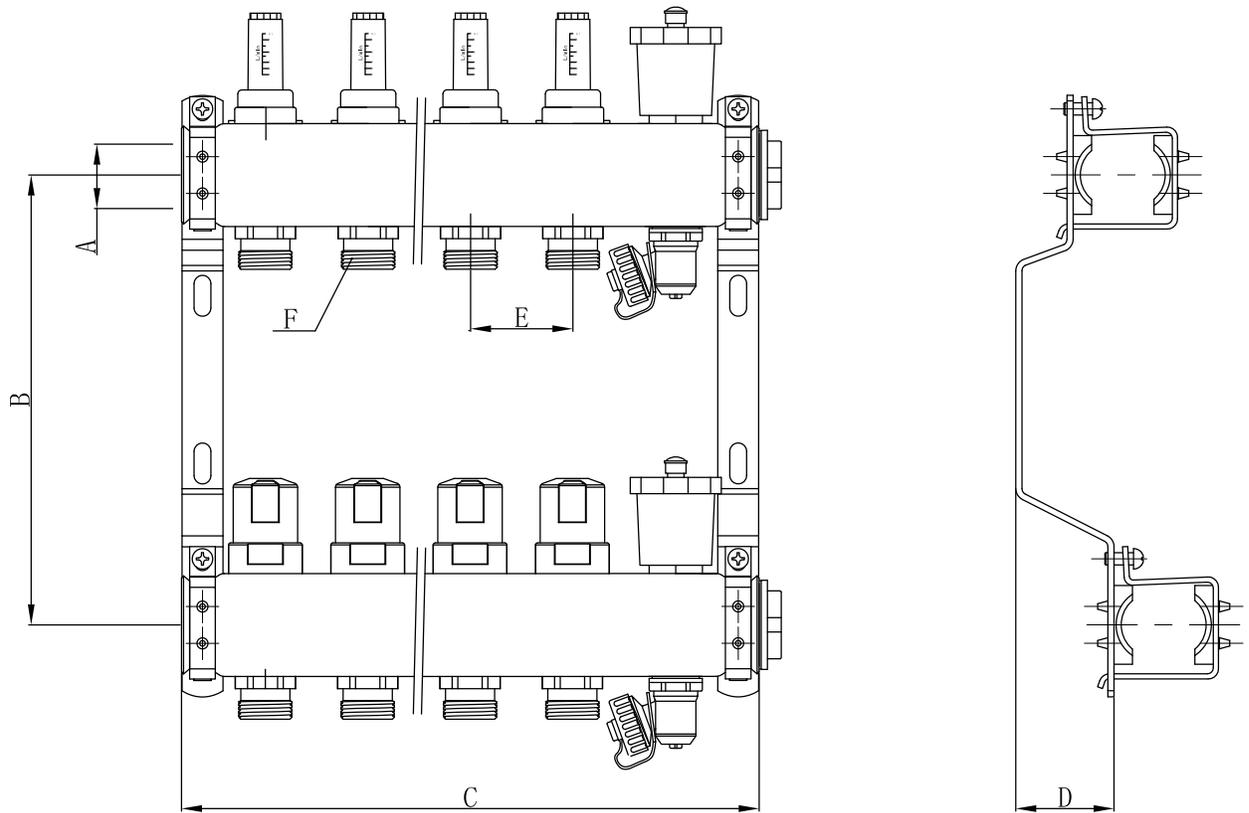

Available Loop Sizes

Order Number	Circuit Size	A	B	C	D	E	F
HFM-109	9 Loops	1-¼"	8-½"	20- ⁵ / ₈ "	2"	2"	3/4"x18TPI
HFM-110	10 Loops	1-¼"	8-½"	22- ⁵ / ₈ "	2"	2"	3/4"x18TPI
HFM-111	11 Loops	1-¼"	8-½"	24- ⁵ / ₈ "	2"	2"	3/4"x18TPI
HFM-112	12 Loops	1-¼"	8-½"	26- ⁵ / ₈ "	2"	2"	3/4"x18TPI